

Major Specifications of DocuCentre-III 4000 / 3010

Basic Function/Copy Function		DocuCentre-III 4000	DocuCentre-III 3010
Type		Console Type	
Memory Capacity*1		512MB (Max.1GB)	
Hard Disk Capacity*2		Option: 40GB	
Scanning Resolution		600x600dpi	
Printing Resolution		2,400dpi-equivalentx600dpi	
Halftone		256 levels	
Warm-up Time		19 seconds or less (at room temperature of 20°C)	
Original Paper Size		Maximum for sheet and book: 297x432 mm (A3, 11x17")	
Output Paper Size	Max.	A3, 11x17" [For By-pass Tray: Max.: A3, 11x17"]	
	Min.	A5 [For By-pass Tray: Postcards (made by Japan Post Service Co., Ltd.), envelope (120x235mm)]	
Output Paper Weight*3	Image Loss	Lead edge 4mm or less, Trail edge 2mm or less, Right & Left Edges 2mm or less	
	1 Tray	56-105g/m ²	
	2 to 4 Trays	56-215g/m ²	
	By-pass Tray	56-215g/m ²	
First Copy Output Time		3.2 seconds (A4LEF) 3.2 seconds (A4LEF)	
Magnification	100%	1: 1±0.7%	
	Preset	1: 0.500, 1.0.707, 1.0.816, 1.0.866, 1:1.154, 1:1.225, 1:1.414	
	Variable	1: 0.25-1.400 (by 1% increments)	
	A4LEF/BSLEF	45cpm	35cpm
Continuous Copy Speed	A4	32cpm	27cpm
	B5	32cpm	27cpm
	B4	29cpm	22cpm
	A3	24cpm	19cpm
Feed Tray/ Capacity*4	Standard	500 sheets x 3 trays + 100 sheets (By-pass Tray)	
	Optional	Feed tray (one tray): 500 sheets High-capacity feed tray (one tray): 2,300 sheets	
	Maximum Paper Capacity	4,400 sheets [standard + feed tray (one tray), high-capacity feed tray (one tray)]	
Continuous Copy		999 sheets	
Output Tray Capacity*4,*5		500 sheets	
Power Supply		100V AC±10%, 15A, 50/60Hz	
Power Consumption		1.5kW or less	
	Sleep Mode: 1.2W*6 or less		
Dimensions		(W)640x(D)679x(H)1,028mm	
		(W)640x(D)679x(H)1,113mm (with Duplex Automatic Document Feeder)	
Weight*6		87kg	
Space Requirement		96kg (with Duplex Automatic Document Feeder)	
		(W)976x(D)679mm (with By-pass Tray extended)	

*1: Extension memory may be required depending on the functions used. Removing 256 MB of memory and purchasing 512 GB of memory is necessary to reach 1,024 MB. *2: Not all of the indicated hard disk capacity may be available. *3: Use of Fuji Xerox brand paper is recommended. Document may not be printed correctly depending on usage conditions. *4: Fuji Xerox "P" paper. *5: When the optional inner catch tray is installed, the capacity of the center tray is 250 sheets (A4LEF), and that of the inner catch tray is 250 sheets (A4LEF). *6: When connected via a network. 2.2W or less when the machine has fax function. *7: Except for toter.

Fax Function

Item	Description	
Sent Document Size	Max.: A3, 11x17", Long size document (Max. 600mm)	
Recording Paper Size	Max.: A3, 11x17", Min.: A5	
Transmission Time	Less than 3 seconds ^{*1}	
Transmission Mode	G3	
Transmission Resolution	Standard	8x3.85 lines/mm, 200x100dpi (7.9x3.9 dots/mm)
	Fine	8x7.7 lines/mm, 200x200dpi (7.9x7.9 dots/mm)
	Super Fine (400dpi)	16x15.4 lines/mm, 400x400dpi (15.7x15.7 dots/mm)
	Super Fine (600dpi)	600x600dpi (23.6x23.6 dots/mm)
Coding Method	MH, MR, MMR, JBIG	
Transmission Speed	G3: 33.6/31.2/28.8/26.4/24.0/21.6/19.2/16.8/14.4/12.0/9.6/7.2/4.8/2.4kbps	
Applicable Lines	Telephone subscriber line, PBX, facsimile communication network (PSTN), Max. 3 ports ^{*2}	

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8x3.85 lines/mm) and in high speed mode (28.8kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: Up to three lines can be connected. Number of ports is that of the channels that can be used for communication.

Internet Fax Function

Item	Description
Sent Document Size	A3, B4, A4
Transmission Resolution	Same as those in Fax Function
Output Format	Format: TIFF-FX, Compression method: MH, MMR, JBIG
Profile	TIFF-S, TIFF-F, TIFF-J
Protocol	To send: SMTP, To receive: SMTP, POP3

Duplex Automatic Document Feeder

Item	DocuCentre-III 4000	DocuCentre-III 3010
Type	Duplex Automatic Document Feeder	
Original Paper Size/Paper Weight	Max.: A3, 11x17", Min.: A5, 38-128g/m ² (Duplex: 50-128g/m ²)	
Feeding Capacity*1	75 sheets	
Feeding Speed*2	45cpm	
Dimensions/Weight	(W)560x(D)517x(H)123mm, 10kg	

*1: Fuji Xerox "P" paper. *2: A4LEF/Simplex

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

●Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. ●Unused postage stamps and post cards. ●Certificate stamps stipulated by law. ●The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range. ●This product has an anti-counterfeit feature. This feature does not assure complete prevention of illegal reproduction. Please be careful about the management of equipment used.



<For Your Safe Use>

●Before using the product, read the Instruction Manual carefully for proper use. ●Use the product with an appropriate and adequate power source and voltage displayed. ●Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For comments about Fuji Xerox and consultation, contact the Customer Information Center.

0120-27-4100

Toll-free call service time: 9:00 to 12:00 and 13:00 to 17:00 excluding Saturdays, Sundays and national holidays (at Headquarters in Tokyo). However, you cannot use this service with an extension telephone with call area restrictions. Please use a nation-wide call available telephone.

The telephone call might be recorded to correctly understand your inquiry or to later check how the receiver provided support.

DocuCentre-III

4000 / 3010



DocuCentre-III 4000 / 3010

Digital Black and White Mulifunction Device



<http://www.fujixerox.co.jp/eng>

Xerox and the sphere of connectivity design are trademarks or registered trademarks of Xerox Corporation in the U.S. and/or other countries.

The contents described herein are correct as of March, 2009. DGE-1172E 0810-2P

Product Summary

Digital monochrome multifunction devices that offer superior features packed into a compact body: DocuCentre-III 4000/3010

Includes a color scanner

A monochrome device can be used for color scanning*1. The DocuCentre-III 4000/3010 achieves a high scanning speed of 52 ipm in monochrome*2 or 45 ipm in full color*2. Which sheets in a series of originals are monochrome and which are in color can be automatically determined, thus allowing quick digitization.

*1: Optional. The Scanner Kit, HDD Extension Kit, and Extended System Memory (512 MB) are required.
*2: Fuji Xerox Standard Document (A4LEF), 200 dpi, stored to mailbox



High speed printing

Continuous, high speed duplex printing is possible at 45 ppm*1. Separating the transport paths for reversing and extracting paper achieves smooth duplex printing. High speed simplex printing at 45 ppm*2 and duplex printing at 45 ppm*1 are possible.

*1: When using A4LEF with the DocuCentre-III 4000, DocuCentre-III 3010: 35 ppm
*2: When using A4LEF with the DocuCentre-III 4000, DocuCentre-III 3010: 35 ppm



* The above shows the DocuCentre-III 4000 with Duplex Automatic Document Feeder, Fax Kit 2, Feeder Tray (1 Tray), and B1-Finisher.

Smooth operation

Middle-size Color Control Panel with 8.4-inch color LCD equipped as standard

A highly user-friendly Middle-size Color Control Panel is equipped as standard. Its color display ensures high visibility.



Neat sorting

Sorting to three output trays selectable according to the function or purpose

Trays can be specified for each job so that copy, print*1, and fax*1 outputs do not get mixed up. When multiple fax lines are introduced, the output trays can be assigned for each line*2.

* When optional Inner Catch Tray and Side Tray are installed.
*1: Optional
*2: When optional G3 Extension Port Kit and Fax Port Extension Kit are installed.



Compact

A1-Finisher fitting within the main unit

The large space for catching paper allows mounting of the A1-Finisher* enabling stapling. The A1-Finisher is more space efficient than conventional models.

* Optional




High image quality

EA toner* achieves both toner economy and high image quality

Through the use of EA toner, which is characterized by small particles and uniform particle size, detailed and beautiful high-quality images can be achieved. Also, EA toner requires fewer manufacturing processes, which reduces CO₂ emissions during manufacturing. Further, through improved toner transfer efficiency and a toner reuse method, waste toner collection bottle is no longer necessary, resulting in a reduced management workload.

* Emulsion aggregation toner

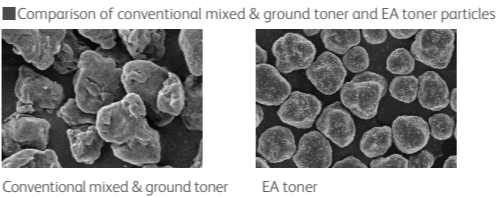

Universal [Various options are available for maximizing usage convenience.]

Color Universal Design-certified



Assist Handle

This handle is for closing the cover.



Attention Light II notifies the status of the machine by blinking

Optional Attention Light II blinks green and orange to notify the status of the multifunction device. In addition to blinking lights, it can also ring a chime, and chime notification without blinking lights can also be selected.

● Green lamp

This lamp notifies the user of the following: fax reception & printing completed, copying/ printing completed, copying/printing in progress.

● Orange lamp

This lamp notifies the user of the following: necessity of paper loading, automatic paper selection errors, paper/original jams.



Operation from PC keyboard while monitoring sound

Voice Assistant allows users to copy or scan without using the control panel or relying on sight. Voice guidance is enabled by activating Voice Assistant installed in a PC, and users can make copying or scanning settings from the PC's keyboard.

* Audio playback software is additionally required

Easy-to-see paper output

The output area is spacious and uses a dark color to make output paper clearly visible.

